Installation manual for the PetSoft S2 GPS tracker version with relay

(abridged version v. 1.01)

Tracker: S2 – Z76 relay Kit: Akcesoria



Basic recommendations:

- GPS tracker power supply connected "before the ignition"
- No **metal elements** above the GPS tracker
- GPS tracker positioned with the label **"THIS SIDE UP"** facing upwards (open sky) **(important)**
- Protect from moisture – the casing is not waterproof.
- Do not attach the GPS tracker to metal bodywork elements of the vehicle.

Cable colour and function description:

1. Red – tracker power supply before the ignition (+) (+12V=)
2. Black – ground (-)
3. White – permanent positive after ignition (+ after ignition)
4. Two pink wires twisted together – insulated NC (normally closed) relay contacts, rated 10A/12V

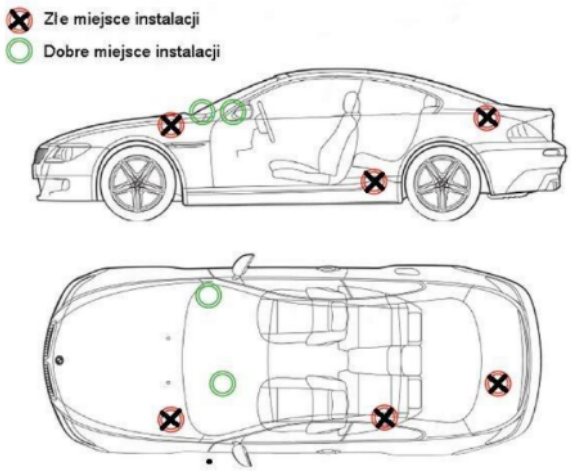
Installing the GPS tracker in the vehicle – cable connection

To correctly install the PetSoft S2 tracker in the vehicle, you should:

- Place the tracker in a dry area of the car (preferably in the dashboard) with the label **"THIS SIDE UP"** facing upwards
- Connect [ground] [power supply "before the ignition"] [positive "after ignition"]
- Connect the relay contacts according to their intended use in the breakable circuit

Start-up

To start the device, connect the power supply to the indicated wires. Then log in to your Monitoring-GPS.net account and check the vehicle's visibility on the map.


Złe miejsce instalacji
Dobre miejsce instalacji